

Economy, convenience, versatility: the spray sprinkler that can be used with virtually any standard nozzle



The SRS lets you take advantage of a spray that offers the unrivaled degree of Hunter quality no matter what nozzle you currently have in stock. Better yet, choose to install the adjustable arc nozzles Hunter has created exclusively for use in tandem with the SRS. Either way, you'll receive a superior spray. One whose construction, highlighted by a rugged flat body cap, is

both brawny and durable. And one whose performance delivers the most effective coverage possible, thanks to a no-flow-by wiper seal that allows your system to handle low water pressure as proficiently as high. And, what truly makes this spray head so hard to resist is that its price is so easy to handle.

Features & Benefits



Rugged body cap design

Stands up to heavy traffic in public areas

Compatible with all standard nozzles

Accepts popular female-threaded nozzles including Hunter adjustable arc nozzles

Heavy-duty UV-resistant wiper seal

Assures long life at a wide range of water pressures

Side inlet

Optional side inlet on 6" (15 cm) and standard side inlet on 12" (30 cm) models for installation convenience

Ratcheting riser for quick arc alignment

Ensures quick pattern alignment

Strong stainless steel spring

Ensures reliable retraction year after year



The SRS offers flexibility at an economical price.

Models

- SRS-00 – Shrub
- SRS-02 – 2" Pop-up (5 cm)
- SRS-03 – 3" Pop-up (7.5 cm)
- SRS-04 – 4" Pop-up (10 cm)
- SRS-06 – 6" Pop-up (15 cm)
- SRS-06-NSI – 6" Pop-up (15 cm)
- SRS-12 – 12" Pop-up (30 cm)

Dimensions

- Overall height:
 - SRS-02 – 4" (10 cm)
 - SRS-03 – 4⁷/₈" (12.5 cm)
 - SRS-04 – 6" (15 cm)
 - SRS-06 – 8¹/₂" (21.5 cm)
 - SRS-06-NSI – 8¹/₂" (21.5 cm)
 - SRS-12 – 15¹/₄" (39 cm)
- ½" female inlet NPT
- Exposed diameter: 2" (5 cm)

Operating Specifications

- Recommended pressure range: 15 to 70 PSI (1.0 to 4.8 bars; 103 to 482 kPa)
- Flow-by: 0 at 10 PSI (.7 bars; 68 kPa) or greater; .1 GPM (0.02 m³/hr; 0.4 l/min) otherwise
- Precipitation rates: approximately 1.5" per hour

SPECIFICATION GUIDE


EXAMPLE: **SRS - 04 - 10H**

MODEL SRS	POP-UP HEIGHT	NOZZLE SERIES	PATTERN
	00 = Shrub	8 = 8 Series	A = Adjustable
	02 = 2" Pop-up	10 = 10 Series	Q = Quarter-Circle
	03 = 3" Pop-up	12 = 12 Series	H = Half-Circle
	04 = 4" Pop-up	15 = 15 Series	F = Full-Circle
	06 = 6" Pop-up	17 = 17 Series	
	06 NSI = 6" Pop-up, Non-side Inlet		
	12 = 12" Pop-up		

Note: Bodies and nozzles sold separately. Also compatible with Hunter's bubbler and specialty nozzles.

Adjustable Arc Nozzles Performance Data

Arc	Pressure PSI	8 Foot Radius Adjustable from 25° to 360° Trajectory: 0° Color Code: Brown ● 8A				10 Foot Radius Adjustable from 25° to 360° Trajectory: 15° Color Code: Red ● 10A				12 Foot Radius Adjustable from 25° to 360° Trajectory: 28° Color Code: Green ● 12A				15 Foot Radius Adjustable from 25° to 360° Trajectory: 28° Color Code: Black ● 15A				17 Foot Radius Adjustable from 25° to 360° Trajectory: 28° Color Code: Gray ● 17A			
		Radius ft.	Flow GPM	Precip in/hr	▲	Radius ft.	Flow GPM	Precip in/hr	▲	Radius ft.	Flow GPM	Precip in/hr	▲	Radius ft.	Flow GPM	Precip in/hr	▲	Radius ft.	Flow GPM	Precip in/hr	▲
45°	20	7'	0.20	3.08	3.56	9'	0.20	1.86	2.15	11'	0.25	1.60	1.85	14'	0.37	1.46	1.69	16'	0.48	1.44	1.67
	25	8'	0.22	2.67	3.08	10'	0.22	1.71	1.97	12'	0.28	1.52	1.76	15'	0.42	1.44	1.66	17'	0.54	1.45	1.67
	30	8'	0.25	2.95	3.40	10'	0.25	1.89	2.18	12'	0.32	1.68	1.95	15'	0.47	1.59	1.84	17'	0.60	1.60	1.85
	35	9'	0.27	2.54	2.93	11'	0.27	1.70	1.96	13'	0.34	1.56	1.80	16'	0.51	1.52	1.76	18'	0.65	1.55	1.79
90°	20	7'	0.39	3.08	3.56	9'	0.39	1.86	2.15	11'	0.50	1.60	1.85	14'	0.74	1.46	1.69	16'	0.96	1.44	1.67
	25	8'	0.44	2.67	3.08	10'	0.44	1.71	1.97	12'	0.57	1.52	1.76	15'	0.84	1.44	1.66	17'	1.09	1.45	1.67
	30	8'	0.49	2.95	3.40	10'	0.49	1.89	2.18	12'	0.63	1.68	1.95	15'	0.93	1.59	1.84	17'	1.20	1.60	1.85
	35	9'	0.53	2.54	2.93	11'	0.53	1.70	1.96	13'	0.69	1.56	1.80	16'	1.01	1.52	1.76	18'	1.31	1.55	1.79
120°	20	7'	0.52	3.08	3.56	9'	0.52	1.86	2.15	11'	0.67	1.60	1.85	14'	0.99	1.46	1.69	16'	1.28	1.44	1.67
	25	8'	0.59	2.67	3.08	10'	0.59	1.71	1.97	12'	0.76	1.52	1.76	15'	1.12	1.44	1.66	17'	1.45	1.45	1.67
	30	8'	0.65	2.95	3.40	10'	0.65	1.89	2.18	12'	0.84	1.68	1.95	15'	1.24	1.59	1.84	17'	1.60	1.60	1.85
	35	9'	0.71	2.54	2.93	11'	0.71	1.70	1.96	13'	0.91	1.56	1.80	16'	1.35	1.52	1.76	18'	1.74	1.55	1.79
180°	20	7'	0.78	3.08	3.56	9'	0.78	1.86	2.15	11'	1.01	1.60	1.85	14'	1.49	1.46	1.69	16'	1.92	1.44	1.67
	25	8'	0.89	2.67	3.08	10'	0.89	1.71	1.97	12'	1.14	1.52	1.76	15'	1.68	1.44	1.66	17'	2.17	1.45	1.67
	30	8'	0.98	2.95	3.40	10'	0.98	1.89	2.18	12'	1.26	1.68	1.95	15'	1.86	1.59	1.84	17'	2.40	1.60	1.85
	35	9'	1.07	2.54	2.93	11'	1.07	1.70	1.96	13'	1.37	1.56	1.80	16'	2.02	1.52	1.76	18'	2.61	1.55	1.79
240°	20	7'	1.05	3.08	3.56	9'	1.05	1.86	2.15	11'	1.34	1.60	1.85	14'	1.98	1.46	1.69	16'	2.56	1.44	1.67
	25	8'	1.18	2.67	3.08	10'	1.18	1.71	1.97	12'	1.52	1.52	1.76	15'	2.24	1.44	1.66	17'	2.89	1.45	1.67
	30	8'	1.31	2.95	3.40	10'	1.31	1.89	2.18	12'	1.68	1.68	1.95	15'	2.48	1.59	1.84	17'	3.20	1.80	1.85
	35	9'	1.42	2.54	2.93	11'	1.42	1.70	1.96	13'	1.83	1.56	1.80	16'	2.70	1.52	1.76	18'	3.48	1.55	1.79
270°	20	7'	1.18	3.08	3.56	9'	1.18	1.86	2.15	11'	1.51	1.60	1.85	14'	2.23	1.46	1.69	16'	2.88	1.44	1.67
	25	8'	1.33	2.67	3.08	10'	1.33	1.71	1.97	12'	1.71	1.52	1.76	15'	2.52	1.44	1.66	17'	3.26	1.45	1.67
	30	8'	1.47	2.95	3.40	10'	1.47	1.89	2.18	12'	1.89	1.68	1.95	15'	2.79	1.59	1.84	17'	3.60	1.60	1.85
	35	9'	1.60	2.54	2.93	11'	1.60	1.70	1.96	13'	2.06	1.56	1.80	16'	3.04	1.52	1.76	18'	3.92	1.55	1.79
360°	20	7'	1.57	3.08	3.56	9'	1.57	1.86	2.15	11'	2.02	1.60	1.85	14'	2.98	1.46	1.69	16'	3.84	1.44	1.67
	25	8'	1.77	2.67	3.08	10'	1.77	1.71	1.97	12'	2.28	1.52	1.76	15'	3.37	1.44	1.66	17'	4.34	1.45	1.67
	30	8'	1.96	2.95	3.40	10'	1.96	1.89	2.18	12'	2.52	1.68	1.95	15'	3.72	1.59	1.84	17'	4.80	1.60	1.85
	35	9'	2.13	2.54	2.93	11'	2.13	1.70	1.96	13'	2.74	1.56	1.80	16'	4.05	1.52	1.76	18'	5.22	1.55	1.79

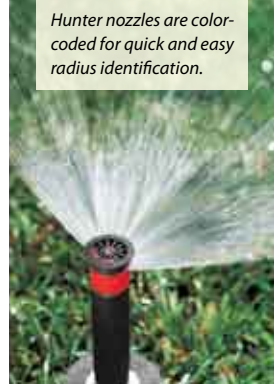

Pro-Spray® Nozzles Performance Data

Arc	Pattern	8 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 0° Color Code: Brown ● 8				10 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 15° Color Code: Red ● 10				12 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 28° Color Code: Green ● 12				15 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 28° Color Code: Black ● 15				17 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 28° Color Code: Gray ● 17				
		Radius ft.	Flow GPM	Precip in/hr	▲	Radius ft.	Flow GPM	Precip in/hr	▲	Radius ft.	Flow GPM	Precip in/hr	▲	Radius ft.	Flow GPM	Precip in/hr	▲	Radius ft.	Flow GPM	Precip in/hr	▲	
90°	Q	20	7'	0.20	1.54	1.78	9'	0.34	1.63	1.88	11'	0.54	1.71	1.98	14'	0.78	1.53	1.77	16'	0.93	1.40	1.61
		25	8'	0.22	1.33	1.53	10'	0.39	1.48	1.71	12'	0.61	1.62	1.87	15'	0.88	1.51	1.74	17'	1.05	1.39	1.61
		30	8'	0.24	1.46	1.69	10'	0.42	1.63	1.89	12'	0.67	1.78	2.06	15'	0.97	1.67	1.92	17'	1.15	1.54	1.77
		35	9'	0.26	1.25	1.45	11'	0.46	1.47	1.69	13'	0.72	1.65	1.90	16'	1.06	1.59	1.84	18'	1.25	1.49	1.72
180°	H	20	7'	0.38	1.49	1.72	9'	0.70	1.67	1.92	11'	1.05	1.67	1.93	14'	1.51	1.48	1.71	16'	1.91	1.43	1.66
		25	8'	0.43	1.28	1.48	10'	0.79	1.53	1.76	12'	1.18	1.58	1.83	15'	1.69	1.45	1.67	17'	2.15	1.43	1.65
		30	8'	0.47	1.41	1.63	10'	0.88	1.69	1.95	12'	1.30	1.74	2.01	15'	1.86	1.59	1.84	17'	2.37	1.58	1.82
		35	9'	0.51	1.21	1.39	11'	0.95	1.52	1.75	13'	1.42	1.61	1.86	16'	2.02	1.52	1.75	18'	2.57	1.53	1.76
360°	F	20	7'	0.78	1.54	1.78	9'	1.29	1.53	1.77	11'	2.17	1.72	1.99	14'	3.04	1.49	1.72	16'	3.84	1.44	1.67
		25	8'	0.88	1.33	1.53	10'	1.45	1.39	1.61	12'	2.45	1.63	1.89	15'	3.41	1.46	1.69	17'	4.34	1.45	1.67
		30	8'	0.97	1.46	1.69	10'	1.59	1.53	1.76	12'	2.70	1.80	2.08	15'	3.75	1.61	1.85	17'	4.80	1.60	1.85
		35	9'	1.05	1.25	1.45	11'	1.72	1.37	1.58	13'	2.93	1.67	1.93	16'	4.07	1.53	1.76	18'	5.22	1.55	1.79

PCN Nozzle & PCB Performance Data

Model	Pressure PSI	Flow GPM	Pattern Type
● 25	30	0.25	Trickle
● 50	30	0.50	Trickle
● 10	30	1.00	Umbrella
● 20	30	2.00	Umbrella

Note: Typical spacing 1 to 3 ft.

Short Radius Nozzles Performance Data

Arc	Pressure PSI	Color Code: Light Brown ●				Color Code: Light Green ●				Color Code: Light Blue ●						
		Nozzle	Radius ft.	Flow GPM	Precip in/hr	Nozzle	Radius ft.	Flow GPM	Precip in/hr	Nozzle	Radius ft.	Flow GPM	Precip in/hr			
90°	20	2Q	2'	0.09	8.66	10.00	4Q	4'	0.20	4.81	5.56	6Q	6'	0.47	5.03	5.80
	25	2Q	2'	0.10	9.63	11.11	4Q	4'	0.22	5.29	6.11	6Q	6'	0.49	5.24	6.05
	30	2Q	2'	0.11	10.59	12.23	4Q	4'	0.22	5.29	6.11	6Q	6'	0.51	5.45	6.30
	35	2Q	2'	0.12	11.55	13.34	4Q	4'	0.24	5.78	6.67	6Q	6'	0.52	5.56	6.42
180°	20	2H	2'	0.14	13.48	15.56	4H	4'	0.24	5.78	6.67	6H	6'	0.52	5.56	6.42
	25	2H	2'	0.12	5.78	6.67	4H	4'	0.41	4.93	5.70	6H	6'	0.95	5.08	5.87
	30	2H	2'	0.14	6.74	7.78	4H	4'	0.43	5.17	5.97	6H	6'	0.97	5.19	5.99
	35	2H	2'	0.16	7.70	8.89	4H	4'	0.44	5.29	6.11	6H	6'	0.98	5.24	6.05
360°	20	2H	2'	0.18	8.66	10.00	4H	4'	0.46	5.53	6.39	6H	6'	0.99	5.29	6.11
	25	2H	2'	0.18	8.66	10.00	4H	4'	0.46	5.53	6.39	6H	6'	1.00	5.35	6.17
	30	2H	2'	0.18	8.66	10.00	4H	4'	0.46	5.53	6.39	6H	6'	1.00	5.	